

# Borso Comp Cartridge

## Sintered Steel Sterile Filter for Gases, Liquids and Steam

The Borso Comp Cartridge filter is designed for removal of particles from gases, liquids and steam. The BCC filter cartridge consists of a re-generable isostatically pressed filter cylinder made from sintered stainless steel. The retention rate ranges from 1µm to 25µm.

### Advantages


- ▶ Good durability against most liquids, aggressive gases and steam.
- ▶ The porosity level is more than 50%, ensuring high particle and dirt load capacity as well as a good flow rate at a low differential pressure.
- ▶ Regeneration by ultrasonic bath.

### Application

- ▶ Aseptic packing
- ▶ Electronics
- ▶ Pharmaceutical
- ▶ Food and beverages
- ▶ Fermentation
- ▶ Plastics
- ▶ Dairy
- ▶ Breweries
- ▶ Chemicals

### Features and Benefits

- ▶ **Filter media and end caps made of stainless steel**  
Good durability against most liquids, gases and aggressive steams. Temperature range from -20°C (-4°F) up to 210°C (410°F).
- ▶ **Retention rate of 1µm, 5µm and 25µm (98% efficiency for steam and 100% efficiency for gases)**  
Exactly defined particle retention rate at given pore size.
- ▶ **Sintered stainless steel filter medium with a porosity level of more than 50%**  
High dirt holding capacity, good flow rate at low differential pressure.
- ▶ Regenerable with ultrasonic bath  
Filtration costs reduced to a minimum, in particular for high dirt load.
- ▶ **Stainless steel sintering technology**  
No use of additives or other chemical binders needed.
- ▶ **Available in 13 sizes**  
Optimum filter size for individual application.



# Product Selection

## Materials of Manufacture

- Filter media : Sintered SS 1.4404
- End caps : SS 1.4301
- Bonding material : Plastic Steel\*
- O-Rings : EPM as standard.  
Silicone, Buna N, iton®,  
FEP (Fluoraz) on request

\* > 150°C (302°F) welded endcaps

## Filtration surface

494 cm<sup>2</sup> per 10" element (10/30) (250 mm).

## Temperature range

-20°C (-4°F) to 210°C (410°F).

## Conversion factor for steam temperature

- Steam temperature °C : 110, 121, 140, 160
- Steam temperature °F : 212, 250, 285, 320
- Conversion factor : 0,5, 1, 2, 3

## Dimension

Element size (inch)	A mm (in)	B mm (in)	C Ø mm (in)	D Ø mm (in)	Correction factor
03/10	76mm (3")	12mm (0.47")	19mm (0.75")	42mm (1.6")	0,12
04/10	104mm (4")	12mm (0.47")	19mm (0.75")	42mm (1.6")	0,17
04/20	104mm (4")	14mm (0.55")	25mm (1")	52mm (2.0")	0,19
05/20	104mm (4")	14mm (0.55")	25mm (1")	52mm (2.0")	0,19
05/25	128mm (5")	14mm (0.55")	25mm (1")	62mm (2.5")	0,32
05/30	128mm (5")	16mm (0.62")	51mm (2")	86mm (3.4")	0,46
07/25	180mm (7")	14mm (0.55")	25mm (1")	62mm (2.5")	0,47
07/30	180mm (7")	16mm (0.62")	51mm (2")	86mm (3.4")	0,68
10/30	254mm (10")	16mm (0.62")	51mm (2")	86mm (3.4")	1,00
15/30	381mm (15")	16mm (0.62")	51mm (2")	86mm (3.4")	1,55
20/30	508mm (20")	16mm (0.62")	51mm (2")	86mm (3.4")	2,10
30/30	762mm (30")	16mm (0.62")	51mm (2")	86mm (3.4")	3,28
30/50	762mm (30")	16mm (0.62")	76mm (3")	140mm (5.5")	5,89


## Absolute retention rate

1µm to 25µm


## Max. differential pressure

5bar (73psi)

*Flow rate of a 10" BCC element - air (1 bar, 20°C)*

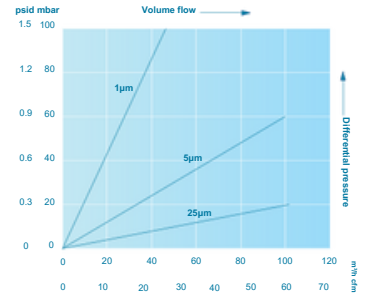

## Flow rate of a 10" BCC element - saturated steam 121°C

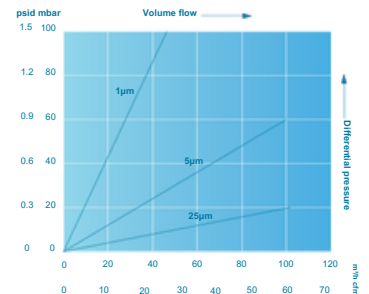

# VAN BORSELEN FILTERS



## ABOUT US

With over 100 years of experience, we have developed deep expertise in filtration and separation. Van Borselen Filters is located in The Netherlands, where an enthusiastic team of filtration and separation specialists is dedicated to serving our clients.



**100 years of  
experience**



**Excellent  
service**



**High-standard  
products**



**BIJ KONINKLIJKE BESCHIKKING  
HOFLEVERANCIER**