



VB-H- 52 SERIES

Single Element Filter Housing

The VB-H-52 Series single cartridge housing is a further development of the successful VB-H-51 Series housing. Still with the ability to accept both standard Double Open End and Single Open End cartridges, this single stack housing has an enhanced Cast clamp and solid ring closure. This provides a housing with a higher pressure rating that has proved very successful in a wide variety of applications within both the liquids and low pressure gas processing industries.

The VB-H-52 Series will accept the full range of Van Borselen and industry standard cartridges ranging from 0.1 to 500µm with nominal lengths of 5, 10, 20 and 30".






Double Open Ended

Single Open Ended

Product Features

- Quick release cast Vee Clamp Closure for easy opening
- Lightweight, high specification investment cast head
- Easy to use tie rod assembly design ensures cartridge centralisation (for a reliable knife edge seal) that enables the use of either 9.75" or 10" cartridge length configurations (or multiples) in the same housing
- Dual purpose head accepts SOE code 3 and DOE cartridges
- SOE code 7 and code B adaptors available
- Available in 316L stainless steel or Alloy 22 for maximum compatibility
- Wide range of connection size and types, cartridge lengths and materials of construction
- PED Compliant to Cat I
- Full traceability on all parts, material certification packs available
- Rated to 20 bar g liquid, 20 bar g gas
- WRAS Approved product



Accessories		Part Number
Pressure Gauge and Vent Valve Kit		53S010003
Ball Valve and Nipple		60S000010
Stand		50S010012
Mounting Bracket		50S010003

Features and Benefits

- Investment Cast head (avoids the porosity & inclusion problems associated with lower quality sand castings)
- Integral vent and drain sockets to aid efficient filter changeout complete with PTFE washer
- Unique interchangeable configuration enables choice of plug in or DOE cartridge styles in the same housing
- Every housing is etched with a serial number for full traceability
- Full housing customisation service available
- Available in both 316L Stainless Steel and Alloy 22
- WRAS Approved product

Product Range

Van Borselen Filters an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. Van Borselen Filters is able to offer a solution to meet all filtration requirements. Van Borselen Filters' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.



VB-H 52 Series Technical Data

Maximum Operating Conditions

Pressure Range: Liquid: FV / 20 bar g
 Gas Group 1: 10" - FV / 20 bar g
 20" - FV / 12 bar g
 30" - FV / 9 bar g
 Gas Group 2: 10", 20" & 30" - FV / 20 bar g
 Temperature Range: -10°C / 150°C

Materials of Construction

Body and Closure: 316L St.Steel Alloy
 22
 Clamp: 304 St.Steel
 Seal: Ethylene Propylene

Finish

Vessel: Externally polished sump, bead blast head

Connections

Inlet/Outlet: 1" BSPF
 Vent: 1/4" BSPF with Plug
 Drain: 1/4" BSPF with Plug

Model	Dimensions					Volume (Litres)	Dry Weight
	A	B	C	D	E		
5"	214	-	-	120	173	1.5	2.0
10"	341	-	-	120	300	2.2	2.6
20"	595	-	-	120	554	3.8	3.6
30"	849	-	-	120	808	5.2	4.6

PED Status:

Compliant with 97/23/EC

Fluid Groups:

Gas Group 1 + 2
 Liquids Group 1 + 2

Marking:

CE



Exceptions:

Group 1 liquids - Explosive

ATEX:

Compliant 94/9/EC, level CE Ex II 2 GD c X

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

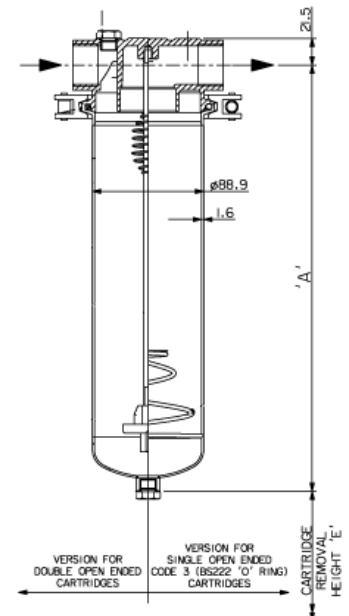

Contact details:



VAN BORSELEN FILTERS



VAN BORSELEN FILTERS BV

Argonstraat 66
 2718 SN Zoetermeer
 Po box 3
 2700 AA Zoetermeer

Telefoon +31 (0)79 3412314
 Telefax +31 (0)79 3412892
 Email: info@vanborselen.nl
 Web: www.vanborselen.nl

Van Borselen Filters BV reserve the right to change specification without prior notice, as part of their continuous product development programme.

